




PRIMARY FIXING  
8mm Coachbolts -  
@ 400mm max CTRS,  
Provide Additional  
Intermediate Fixing at  
Stacked End/s - 75mm  
Centres 300mm From Jambs

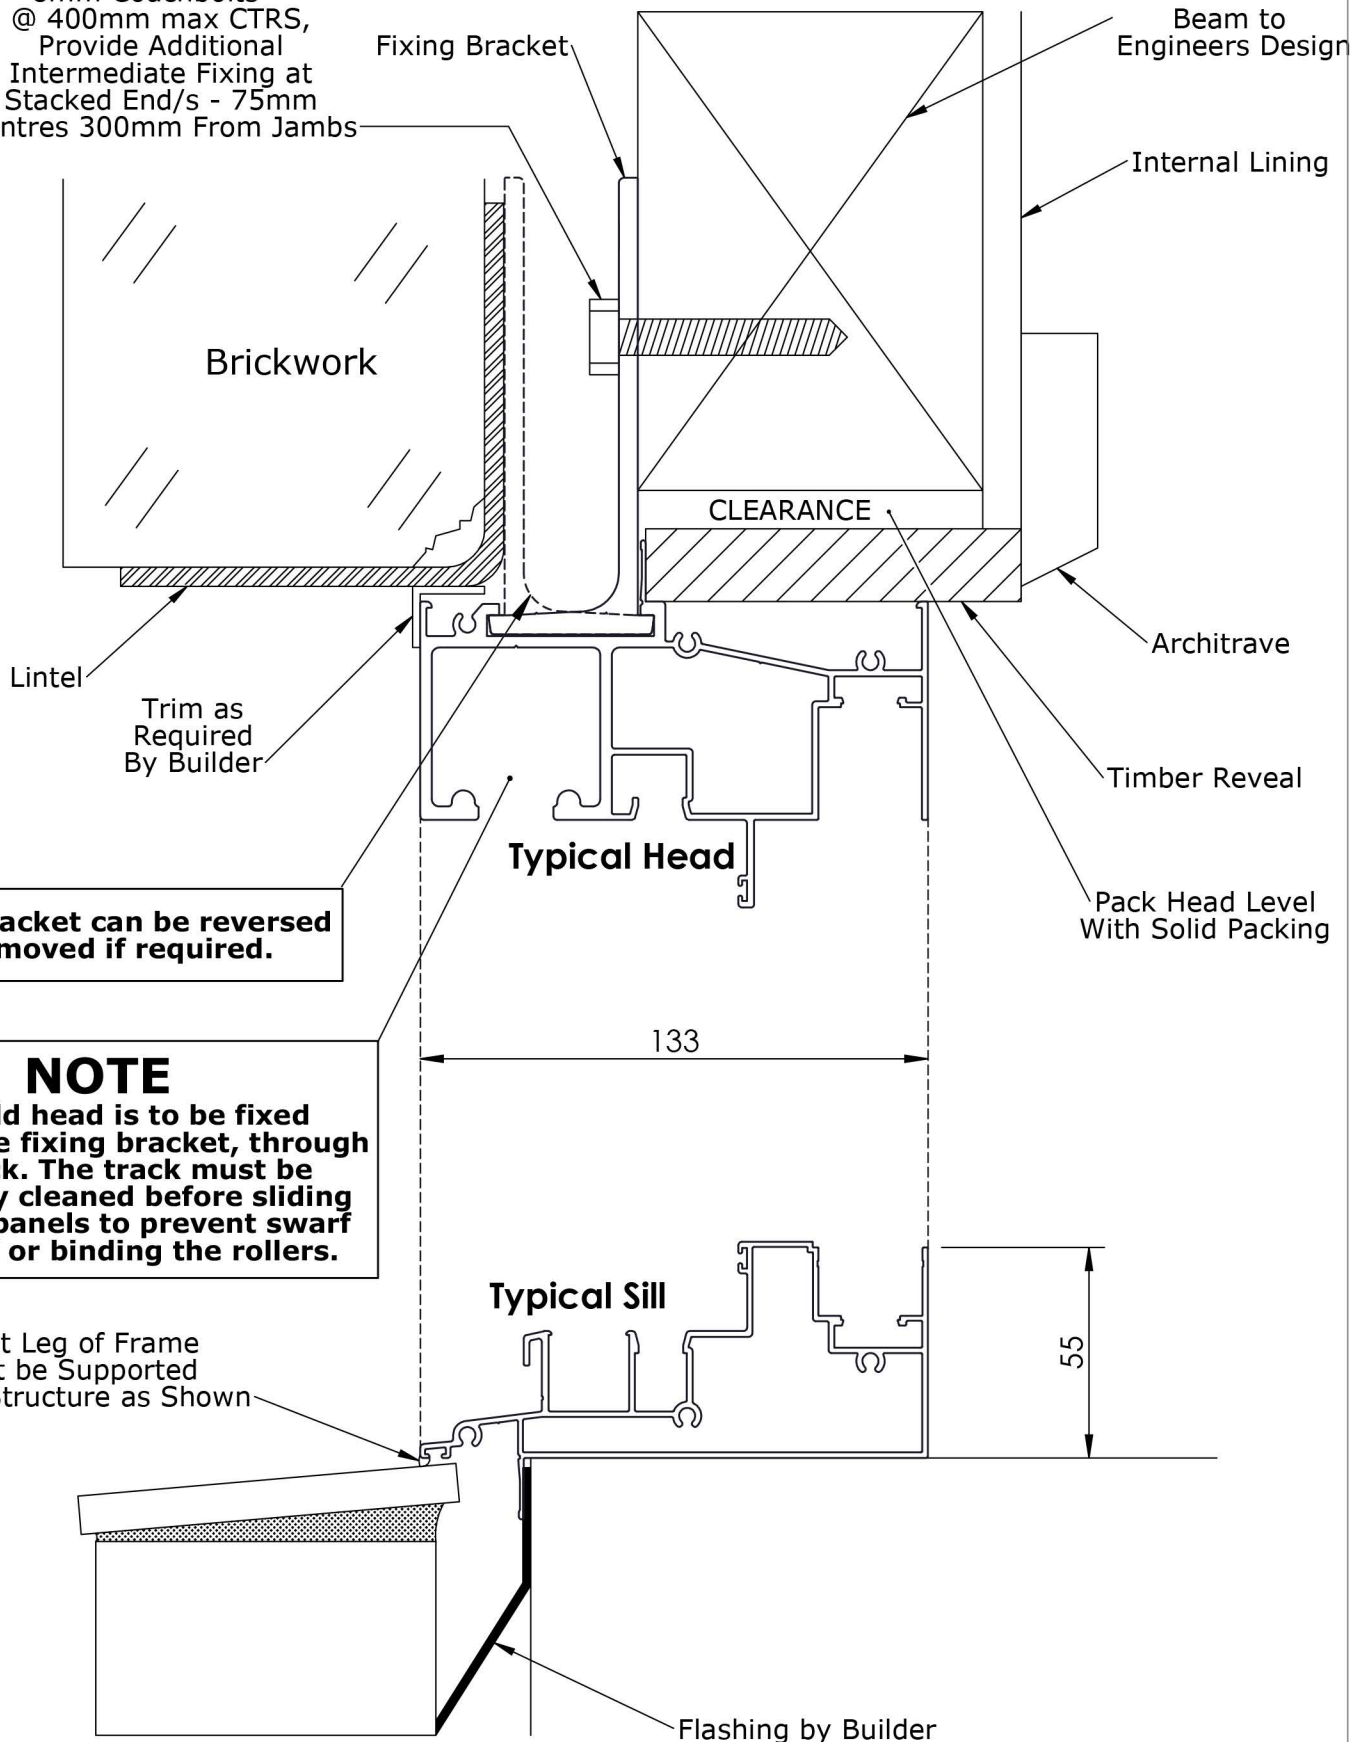

Fixing Bracket can be reversed or removed if required.

**NOTE**

If Bi-fold head is to be fixed without the fixing bracket, through the track. The track must be thoroughly cleaned before sliding the door panels to prevent swarf jamming or binding the rollers.

Front Leg of Frame Must be Supported by the Structure as Shown



## TYPICAL JAMB DETAIL

